Sound Control Technologies

RC-SDA5+™ & RM-3CP™ Design Guide

Last Update: 10/16/2024

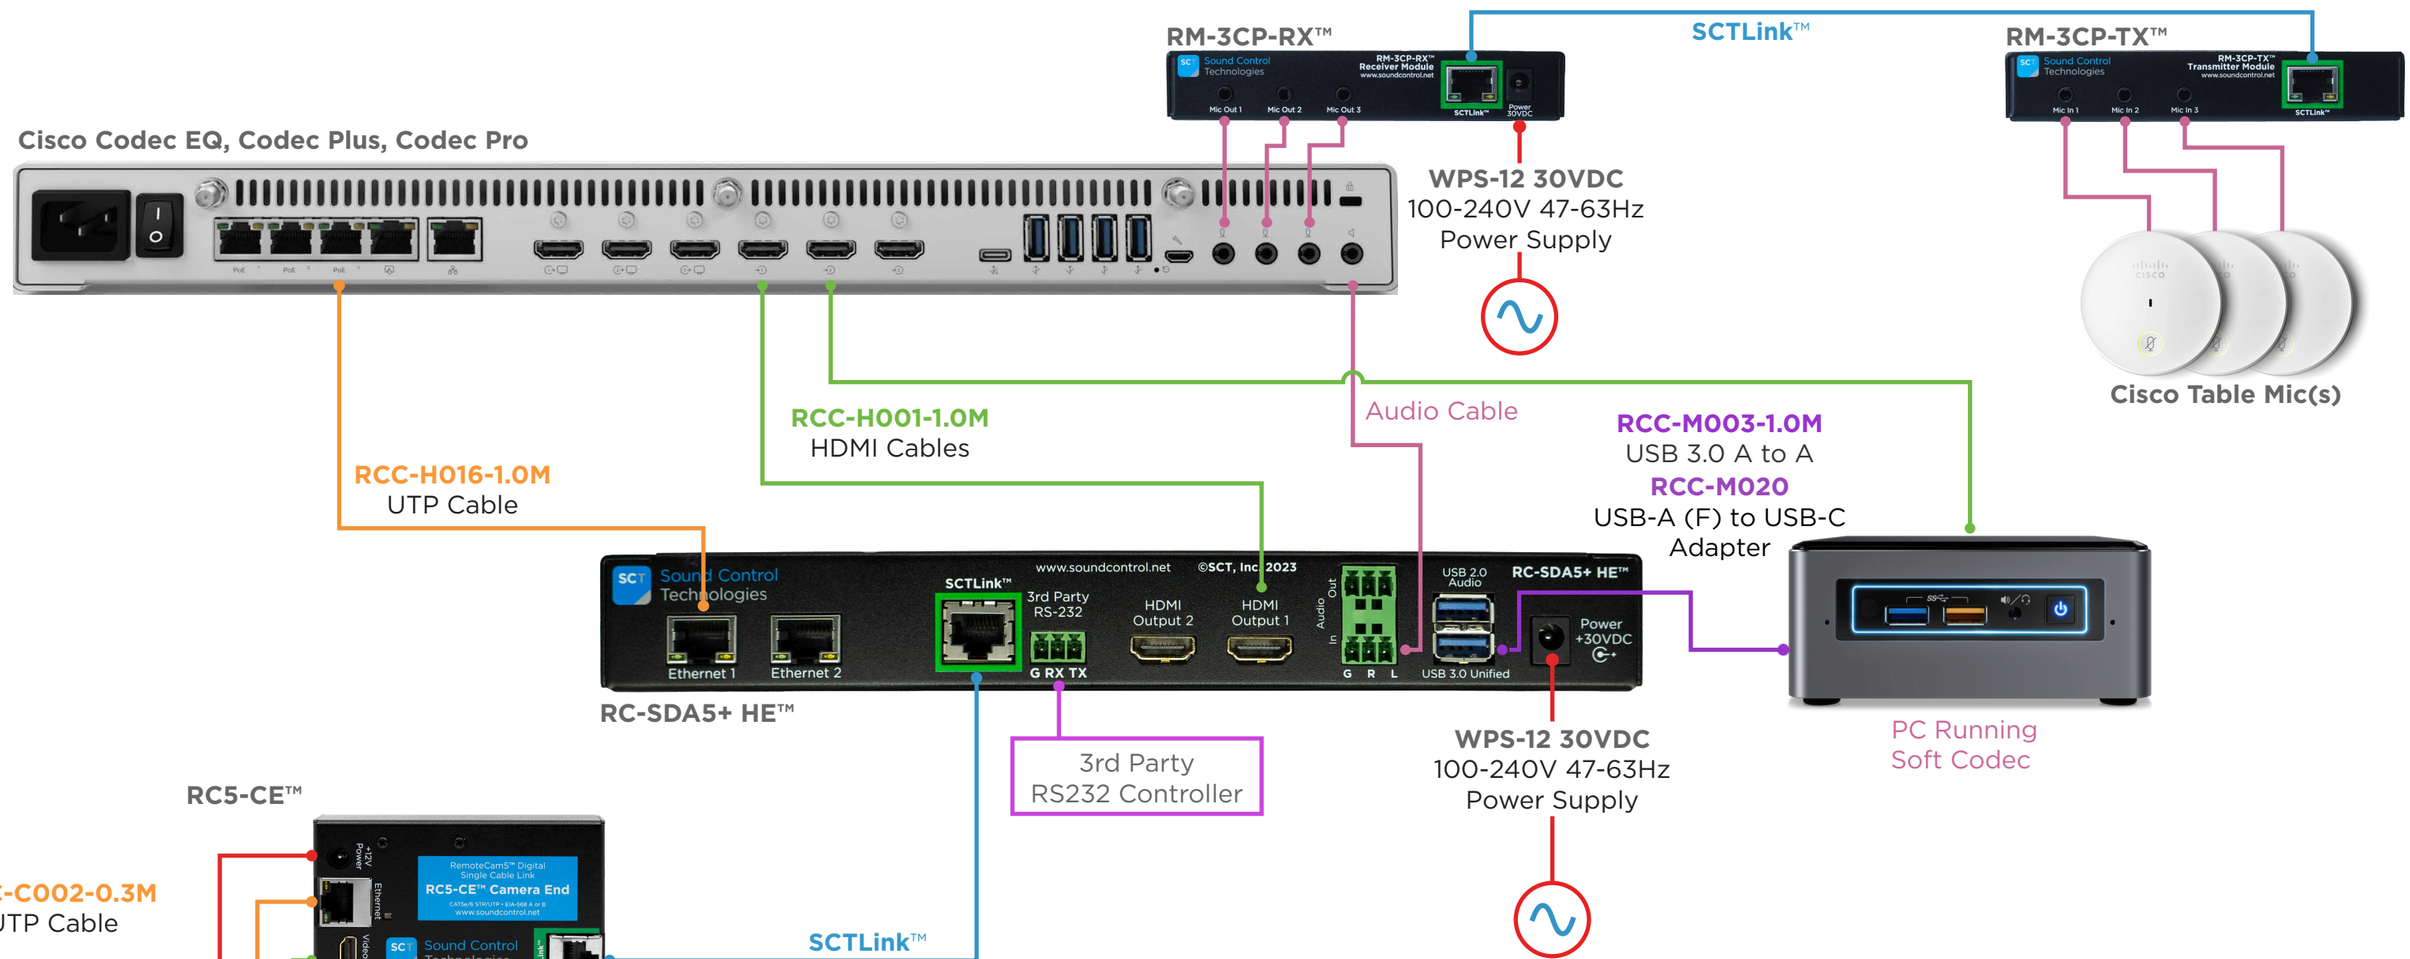

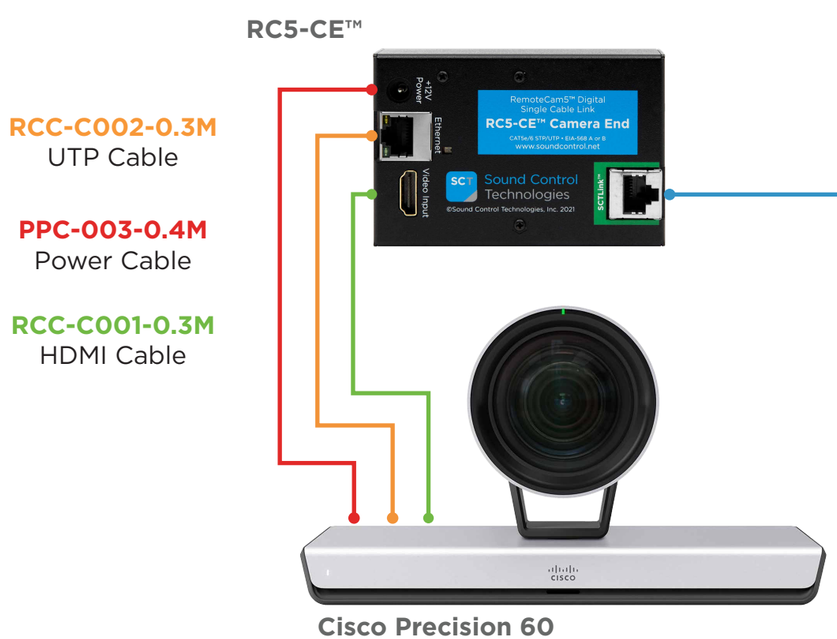

SCTLink™ Cable Specs

Integrator-Supplied CAT6 STP/UTP Cable
T568A or T568B (10m-100m min/max Length)

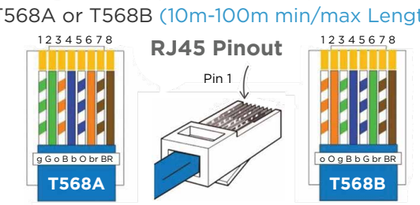

Notes:

- In Cisco Codec settings set “Line Output Type” to “Microphone”.

- In Cisco Codec settings disable AGC if soft codec experiences distortion from microphone.

- Set soft codec audio output to HDMI/ Display Audio.

- Set soft codec Microphone device as: Microphone (SCT USB Unified Audio)