Sound Control Technologies

RC-SDA5+™ Design Guide

Last Update: 10/16/2024

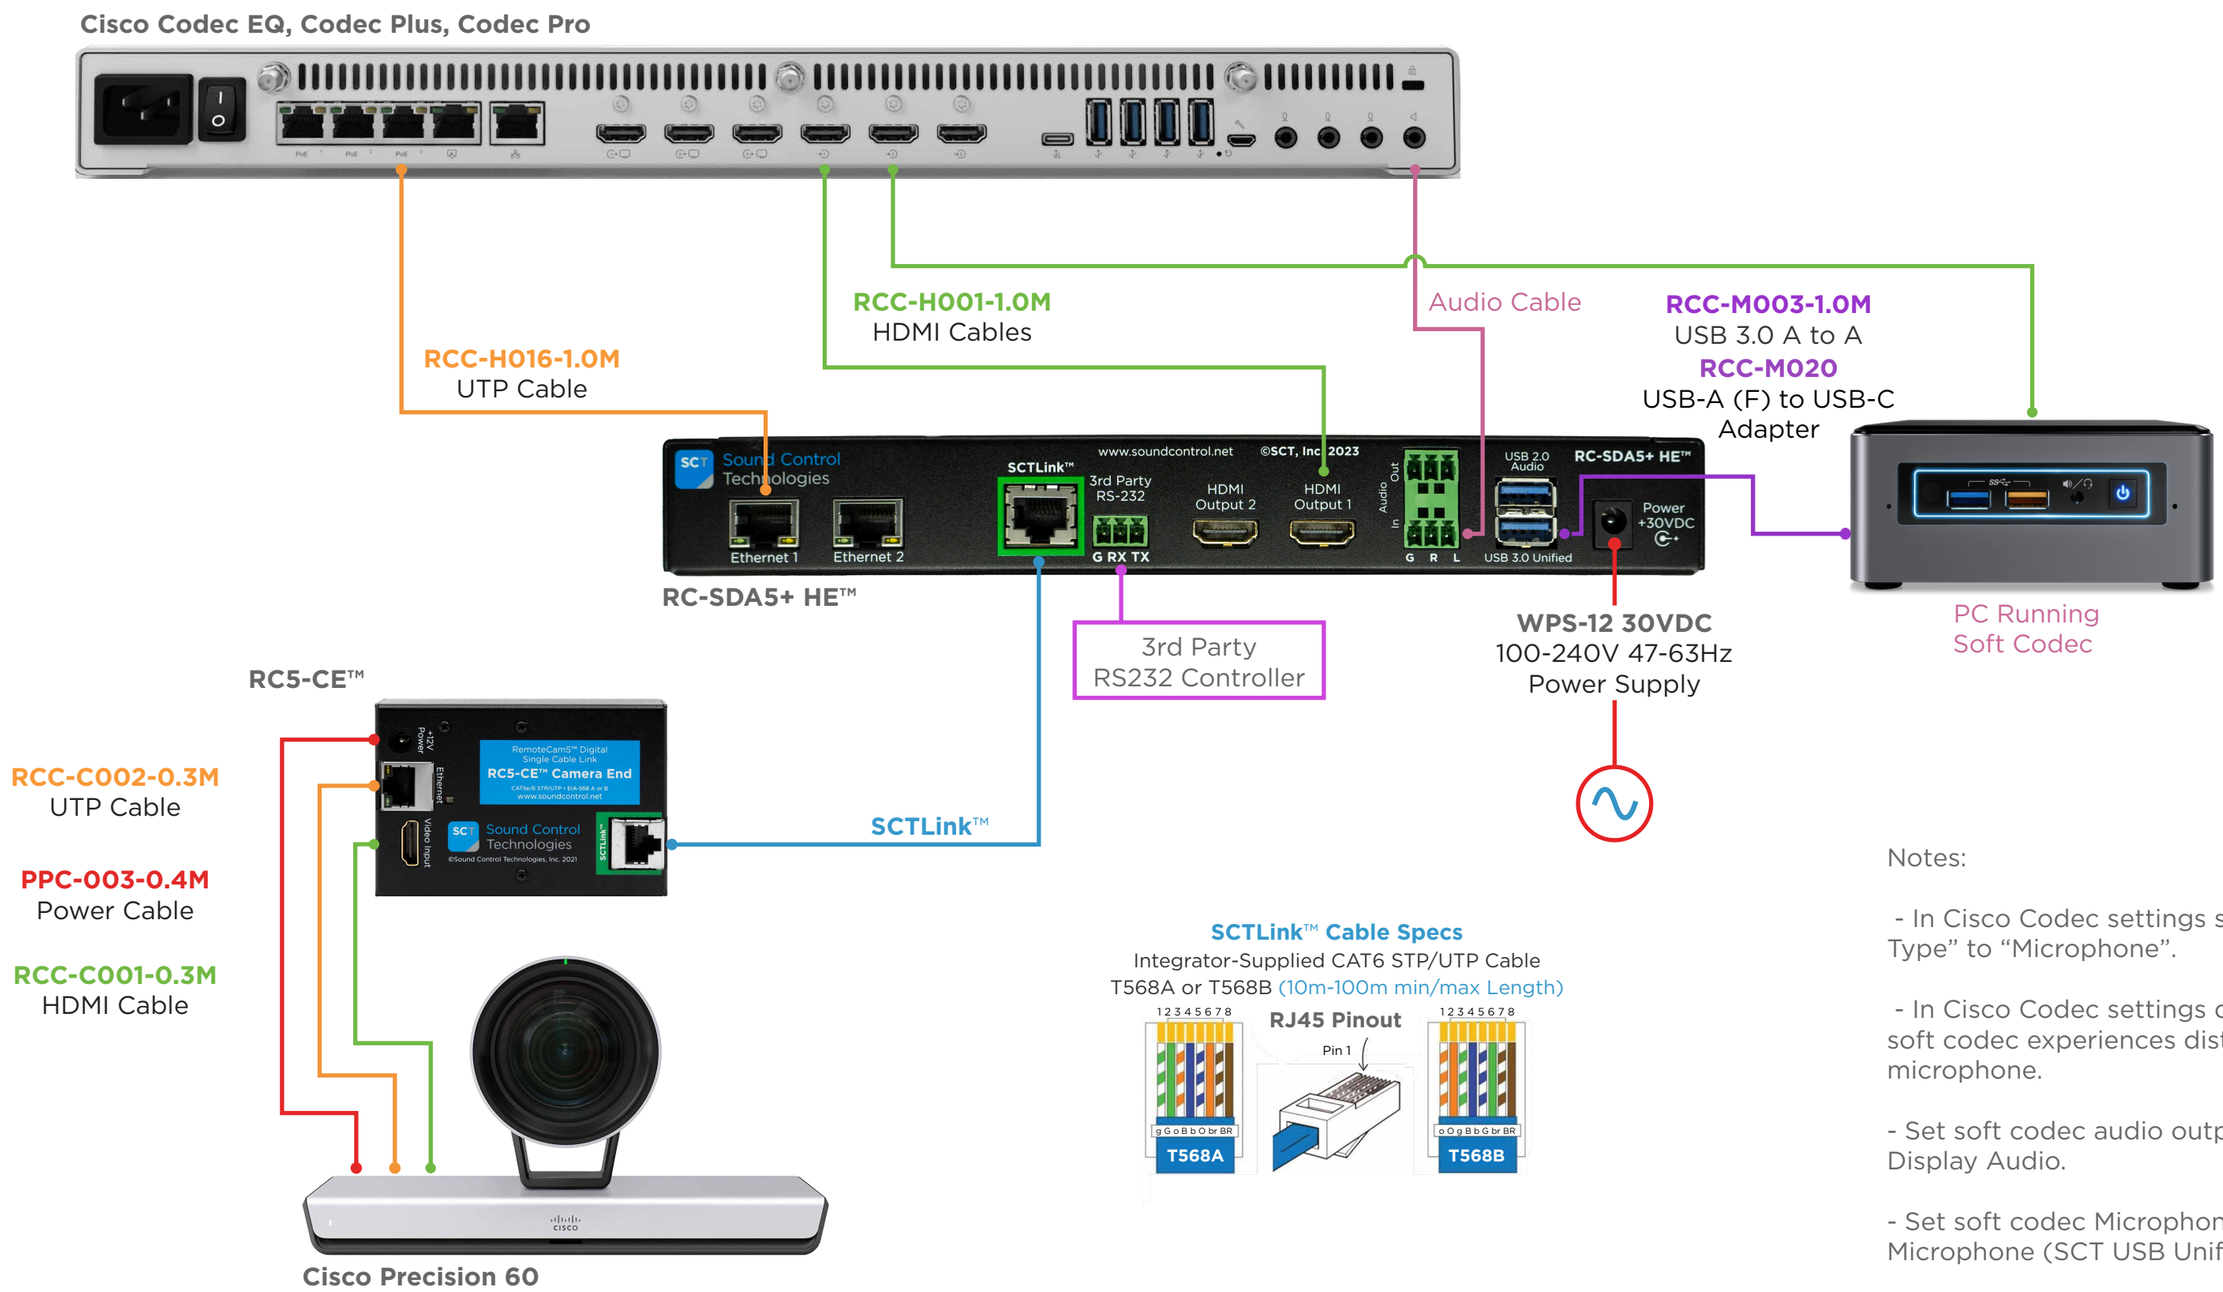

Notes:

- In Cisco Codec settings set “Line Output Type” to “Microphone”.

- In Cisco Codec settings disable AGC if soft codec experiences distortion from microphone.

- Set soft codec audio output to HDMI/ Display Audio.

- Set soft codec Microphone device as: Microphone (SCT USB Unified Audio)