




1Beyond Hawk

Important: Due to the power demands of 1Beyond's Hawk camera, it is best practice to utilize SCT's provided **RC-RKM™** rack shelf to facilitate ventilation.

SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
T568A or T568B (10m-100m min/max Length)

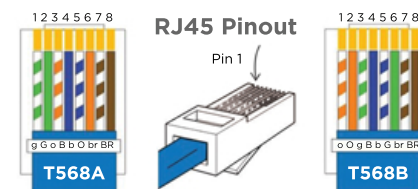

RCC-C001-0.3M
HDMI Cable


RCC-C005-0.3M
RJ45 Y Cable
to 8 Pin Din
to Power

SCTLink™ Cable

Power, Control, Audio & Video
The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

UTP Cable
Integrator-Supplied

TRS Audio Cable
Integrator-Supplied

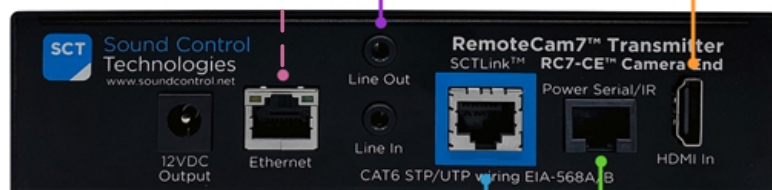

RC7-CE™



WPS-48 48VDC
100-240V~47-63Hz
Power Supply



RC7-HE™

TRS Audio Cable
Integrator-Supplied

3rd Party Control + Video Device

RCC-H001-1.0M
HDMI Cable

RS232 Control Cable
Integrator-Supplied

3rd Party Device

Module Dimensions

RC7-CE™: H: 1.6" (40mm) x W: 6.48" (164mm) x D: 4.55" (115mm)

RC7-HE™: H: 1.6" (40mm) x W: 8.65" (219mm) x D: 4.55" (115mm)