



Panasonic AW-UE100, AW-UE145 AW-UE150 & AW-UE160

The RC7-P15™ supports resolutions up to 1080p60/4K30

Important: Due to the power demands of Panasonic's AW-UE150, it is best practice to utilize SCT's provided **RC-RKM™** rack shelf to facilitate ventilation.

RCC-C001-0.3M

HDMI to HDMI Video Cable

RCC-C002-0.3M


RJ45 to RJ45 UTP Control Cable

PPC-021-0.3M

Power Cable

SCTLink™ Cable Specs


Integrator-Supplied CAT6 STP/UTP Cable
T568A or T568B (10m-100m min/max Length)

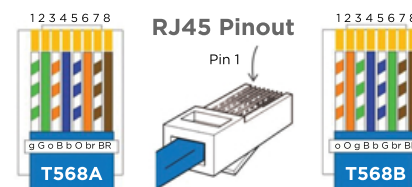

SCTLink™ Cable

Power, Control, Audio & Video

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

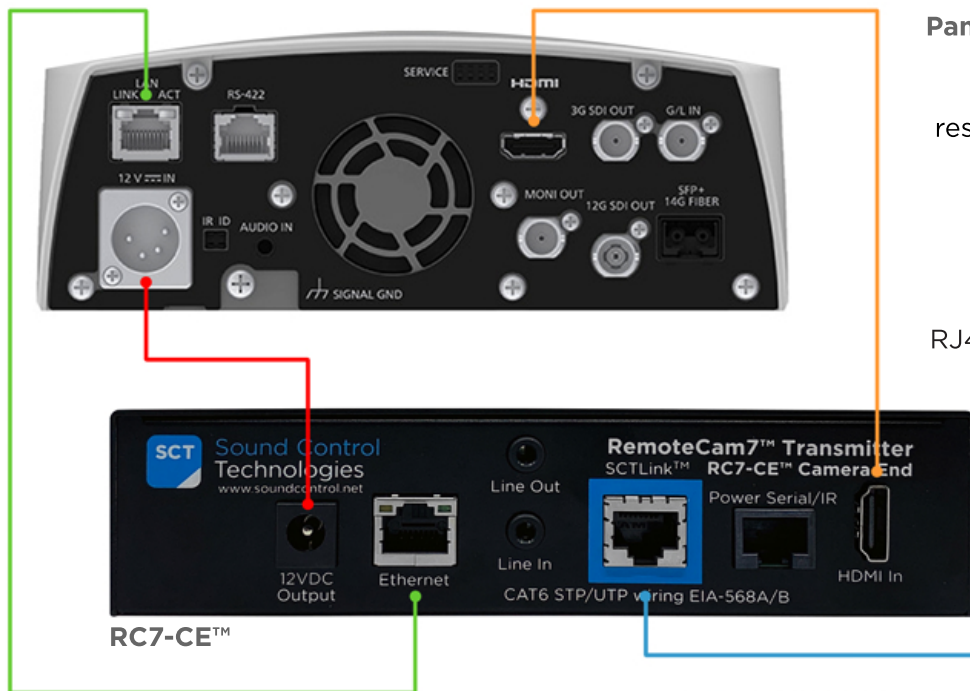

WPS-48 48VDC
100-240V~47-63Hz
Power Supply



RCC-H016-1.0M
RJ45 to RJ45 UTP Control Cable

RCC-H001-1.0M
HDMI to HDMI Video Cable
(HDMI to DVI Adaptor not included)



Panasonic AW-HS50 or Generic Controller



Module Dimensions

RC7-CE™: H: 1.6" (40mm) x W: 6.48" (164mm) x D: 4.55" (115mm)

RC7-HE™: H: 1.6" (40mm) x W: 8.65" (219mm) x D: 4.55" (115mm)