

RCU2-C00™ USB Application Guide

Updated: 10/19/2021


The **RCU2-C00™** supports multiple camera models:

- Aver CAM 340+
- Huddly IQ
- Huddly GO
- Jabra Panacast 3
- Lumens VC-B11U
- Panasonic AW-UE4
- Poly G7500 Codec
- Poly X70 Device Mode
- VDO360 3SEE

Shown: **Poly G7500 Codec**



RCC-M005-0.3M
USB-A (RCU2-CE™) to USB-C

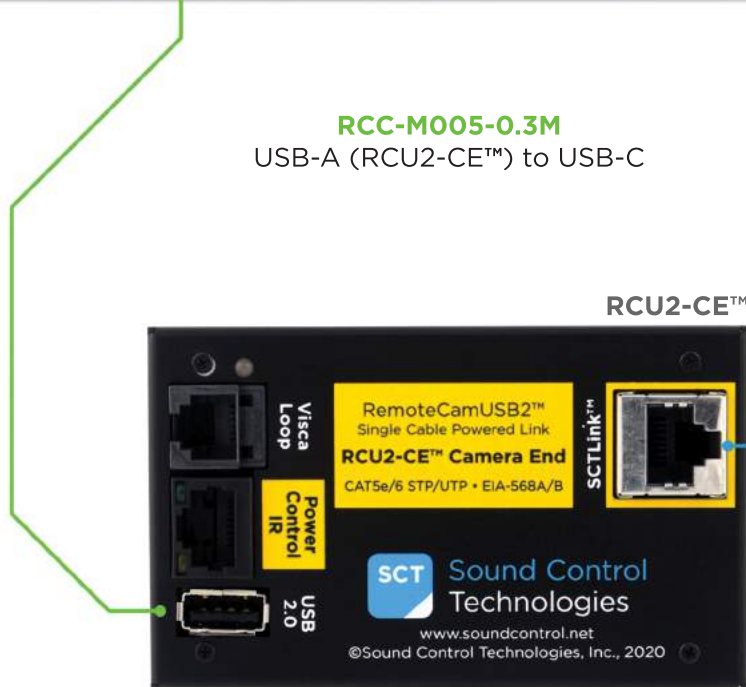

RCC-M004-1.0M
USB-B (RCU2-HE™) to USB-A



SCTLink™ Cable
Power, Control & Video


The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

WPS-12 30VDC
100-240V 47-63Hz
Power Supply



SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
T568A or T568B (100m Max Length)

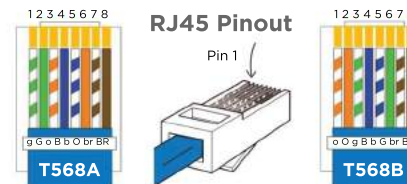

Module Dimensions

RCU2-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)
RCU2-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)