




**Sony SRG-120DH
& Starleaf VHD-61**

RCC-C005-0.3M
RJ45 Y Cable
to 8-Pin Mini-Din
to Sony Power

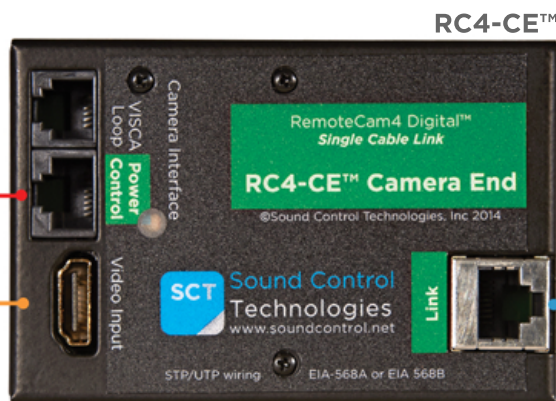


RCC-C001-0.3M
HDMI to HDMI Video Cable



**Starleaf GT Mini 3330,
GT 3351 & GTm 5250**

RCC-H001-1.0M
HDMI to HDMI Video Cable

RCC-H017-1.0M
DB9 to 8-Pin Mini-Din
Control Cable

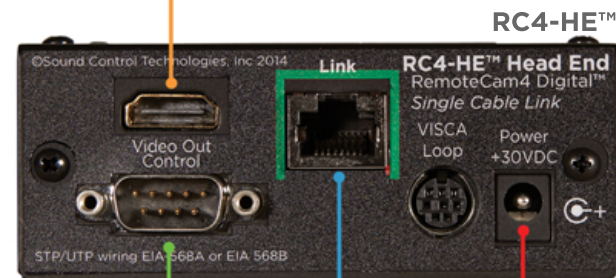


WPS-12 30VDC
100-240V 47-63Hz
Power Supply

SCTLink™ Cable
Power, Control & Video

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
T568A or T568B (10m-100m min/max Length)

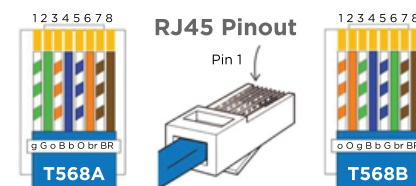

Module Dimensions

RC4-CE™: H: 0.93" (23mm) x W: 2.5" (63mm) x D: 3.741" (95mm)

RC4-HE™: H: 1.504" (38mm) x W: 3.813" (96mm) x D: 3.617" (91mm)