




Note: Turn on DIP switch 1 to enable Cisco communications if connecting to codec via RS-232

Cisco Quad Camera

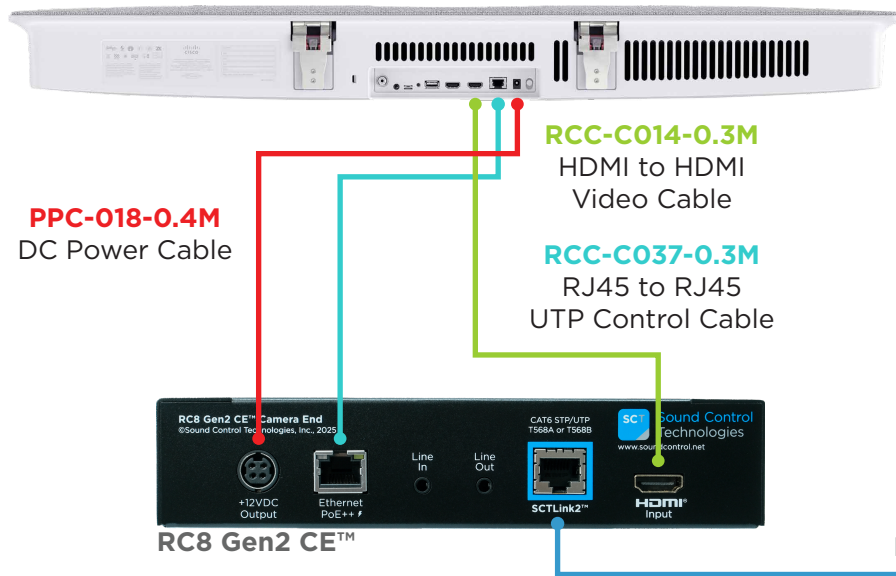

WPS-48V2.5A
100-240V 47-63Hz
Power Supply


SCTLink™ Cable
Power, Control & Video

SCTLink™ Cable Specs
Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
T568A or T568B (10m-100m min/max Length)

RCC-H016-1.0M
RJ45 to RJ45
UTP Control Cable

RCC-H001-1.0M
HDMI to HDMI
Video Cable

RCC-M013-1.0M
USB-A to RS-232
Cable

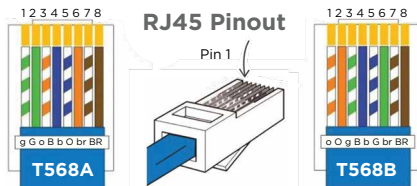

Cisco Codec Plus, Codec Pro, Codec EQ, Room Bar & Room Bar Pro