




The Integrator is responsible for establishing an audio connection between the Director II and Codec.

SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable T568A or T568B (10m-100m min/max Length)

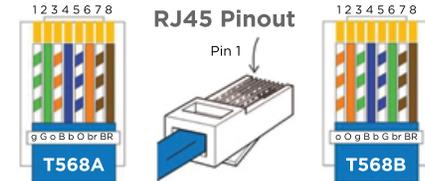

Poly Director II



RCC-C029-0.3M
Power Cable

SCTLink™ Cable

Power, Control & Video

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.



WPS-12 30VDC
100-240V 47-63Hz
Power Supply

RC4-CE™



RCC-C030-0.3M
Mini-HDCI Y Cable
to HDMI/RJ45

RC4-HE™



RCC-H030-1.0M
HDCI Y Cable
to HDMI/DB9



Module Dimensions

RC4-CE™: H: 0.93" (23mm) x W: 2.5" (63mm) x D: 3.741" (95mm)

RC4-HE™: H: 1.504" (38mm) x W: 3.813" (96mm) x D: 3.617" (91mm)

Poly RPG300, RPG500, RPG700 & RPG7500