



AVer
CAM520 Pro Advanced,
CAM520 Pro3, CAM550,
CAM570, & MD120U

RCC-C001-0.3M
HDMI to HDMI Video Cable

RCC-C005-0.3M
RJ45 Y-Cable
to 8-Pin Mini-Din (Aver COMPRO232)
to EIAJ-4 DC Plug (Unused)

Aver COMPRO232
Aver-Supplied Adaptor Cable
9-Pin Mini-Din Y-Cable
"RS232 Out" to 8-Pin Mini-Din (RCC-C005-0.3M)
"RS232 In" 8-Pin Mini-Din (Unused)

PPC-022-0.3M
RJ11 to DC Plug Power Cable




RCC-H010-2.0M
DB9F to DB9F

RCC-H013-3.0M*
DB9F to 8-Pin Mini-Din

Purchased Separately for Sony Joystick Control

**3rd Party
Control Device**

RCC-H001-1.0M
HDMI to HDMI Video Cable

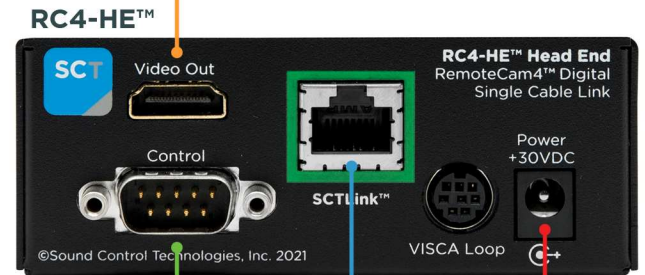


WPS-12 30VDC
100-240V 47-63Hz
Power Supply

SCTLink™ Cable
Power, Control & Video

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
T568A or T568B (100m Max Length)



Module Dimensions

RC4-CE™: H: 0.93" (23mm) x W: 2.5" (63mm) x D: 3.741" (95mm)

RC4-HE™: H: 1.504" (38mm) x W: 3.813" (96mm) x D: 3.617" (91mm)