




HuddleCamHD SimpliTrack Lite




PCC-022-0.3M
Power Cable

RCC-C005-0.3M
RJ45 Control Cable
to 8-Pin Mini-Din
to EIAJ-4 DC Plus (unused)

RCC-C001-0.3M
HDMI to HDMI
Video Cable

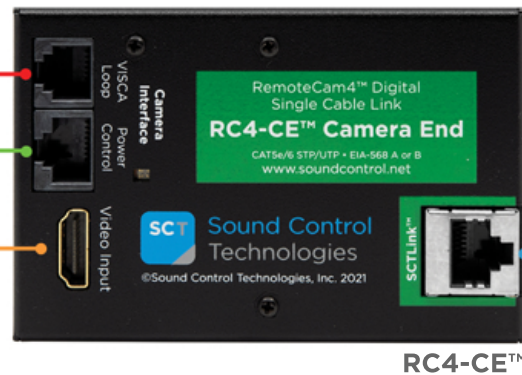

RCC-H001-1.0M
HDMI to HDMI Video Cable

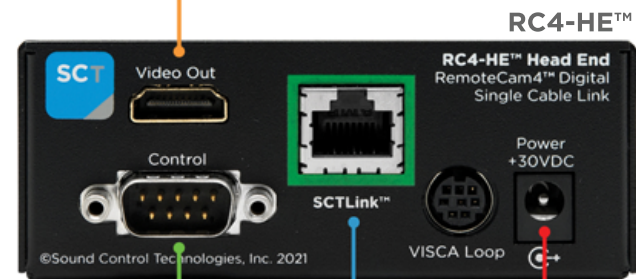

**3rd Party
Control Device**


RCC-H010-2.0M
DB9F to DB9F
RCC-H013-3.0M*
DB9F to 8-Pin Mini-Din
**Purchased Separately
for Sony Joystick Control**

WPS-12 30VDC
100-240V 47-63Hz
Power Supply



SCTLINK™ Cable
Power, Control & Video
The **SCTLINK™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

SCTLINK™ Cable Specs
Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
T568A or T568B (10m-100m min/max Length)



Module Dimensions

RC4-CE™: H: 0.93" (23mm) x W: 2.5" (63mm) x D: 3.741" (95mm)

RC4-HE™: H: 1.504" (38mm) x W: 3.813" (96mm) x D: 3.617" (91mm)