Sound Control Technologies

RC4-USM™ Application Guide

Updated: 02/16/2024

The **RC4-USM™** supports multiple camera models:

- Atlona HDVS-CAM-HDMI
- AVer TR311HN
- AVer TR311HWV2
- AVer TR313/TR313V2
- AVer PTZ310UV2
- AVer PTZ310UNV2
- AVer TR323NV2
- AVer TR333V2
- AVer PTZ330UV2
- AVer PTZ330UNV2
- AVer PTZ310
- AVer PTZ330
- VHD V60UL/V61UL/V63UL
- VHD V60CL/V61CL/V63CL
- AVer PTZ211
- AVer PTZ231

Shown:
Aver PTZ310

RCC-H001-1.0M
HDMI to HDMI Video Cable

HDMI Video Output

RC4-HE™

RCC-C005-0.3M
RJ45 Y Cable
to 8-Pin Mini-Din
to 4mm Power Barrel

3rd Party Control Device

RCC-H010-2.0M
DB9F to DB9F

RCC-H013-3.0M*
DB9F to 8-Pin Mini-Din
Purchased Separately for Sony Joystick Control

WPS-12 30VDC
100-240V 47-63Hz
Power Supply

RC4-CE™

SCTLink™ Cable
Power, Control & Video

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

RCC-C001-0.3M
HDMI to HDMI Video Cable

SCTLink™ Cable Specs
Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
T568A or T568B (10m-100m min/max Length)

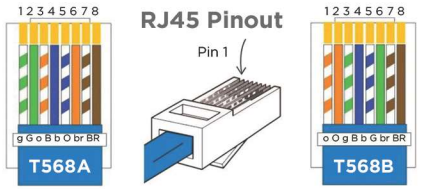

Module Dimensions
RC4-CE™: H: 0.93" (23mm) **x W:** 2.5" (63mm) **x D:** 3.741" (95mm)
RC4-HE™: H: 1.504" (38mm) **x W:** 3.813" (96mm) **x D:** 3.617" (91mm)