



The **RCU2E-B00™** supports multiple camera models:

- 1Beyond IV-CAMFR-12
- 1Beyond AutoFramer
- AVer Cam550
- AVer TR313V2
- AVer TR530+
- VDO360 Saber20X
- VHD VX70IL
- 1Beyond AutoFinder
- AVer Cam520 Pro Advanced
- AVer Cam570
- AVer TR323NV2
- AVer TR333V2
- Sony SRG-XP1
- VHD VX710N
- 1Beyond IV-CAM-I12-B
- VHD VX120
- YeaLink UVC86
- 1Beyond IV-CAM-I20-B
- Poly E60



RCU2E-HE™ Front Panel
Field-Upgradeable microSD Slot




RCC-C002-0.3M
RJ45 (RCU2E-CE™) to RJ45

RCC-M004-0.3M
USB-A (RCU2E-CE™) to USB-B

Poly E60

RCU2E-CE™

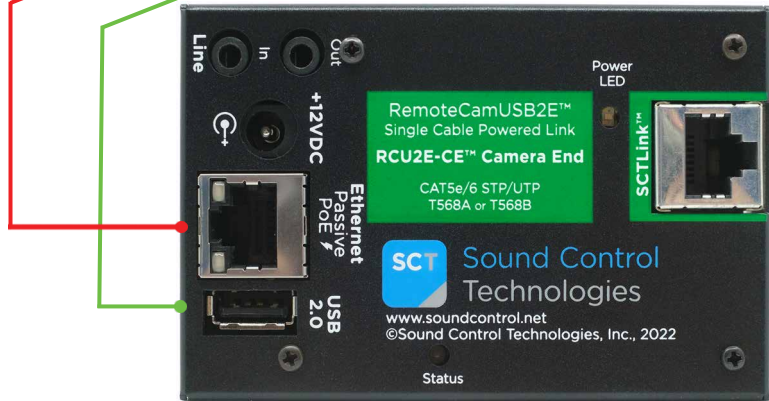

RCU2E-HE™

WPS-12 30VDC
100-240V 47-63Hz
Power Supply



SCTLink™ Cable
Power, Control & Video

Refer to the RCU2E data sheet for cable specifications

RCC-M004-1.0M
USB-B (RCU2E-HE™) to USB-A



Module Dimensions

RCU2E-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)

RCU2E-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)