



AVer Cam550



The **RCU2S-B30™** supports multiple camera models:

- 1Beyond IV-CAMFR-12
- 1Beyond AutoFramer
- 1Beyond AutoTracker
- AVer Cam520 Pro Advanced
- AVer Cam550
- AVer Cam570

RCC-M004-0.3M

USB-A (RCU2E-CE™) to USB-B

RCC-C002-0.3M

RJ45 (RCU2E-CE™) to RJ45


PPC-003-0.3M

DC Power Plug (RCU2E-CE™) To DC Power Plug

RCU2E-HE™ Front Panel

Field-Upgradeable microSD Slot

RCU2E-HE™

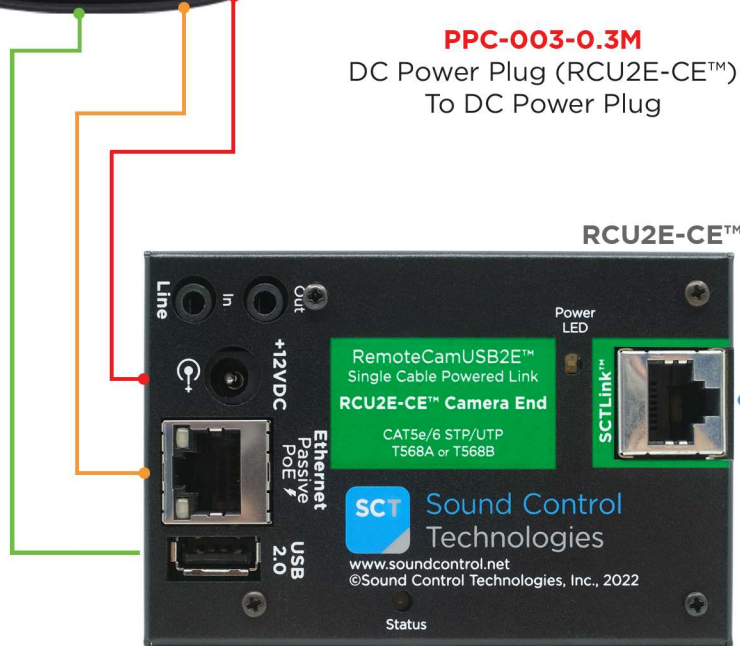

SCTLink™ Cable
Power, Control & Video
Refer to the RCU2E data sheet for cable specifications

WPS-12 30VDC
100-240V 47-63Hz
Power Supply



RCC-H016-1.0M
RJ45 (RCU2E-CE™) to RJ45

RCC-M004-1.0M
USB-B (RCU2E-HE™) to USB-A
RCC-M014-1.0M
USB-B (RCU2E-HE™) to USB-C

Module Dimensions

RCU2E-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)

RCU2E-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)