




Sony SRG-X40UH



- Supported Cameras:
- PTZ Optics Move SE
 - Sony SRG-X40H

- RCC-M005-0.3M**
USB-A (RCU2E-CE™) to USB-C
- RCC-C002-0.3M**
RJ45 (RCU2E-CE™) to RJ45
- PPC-004-0.3M**
DC Power Plug (RCU2E-CE™)
To EIAJ-4 DC Power Plug

RCU2E-HE™

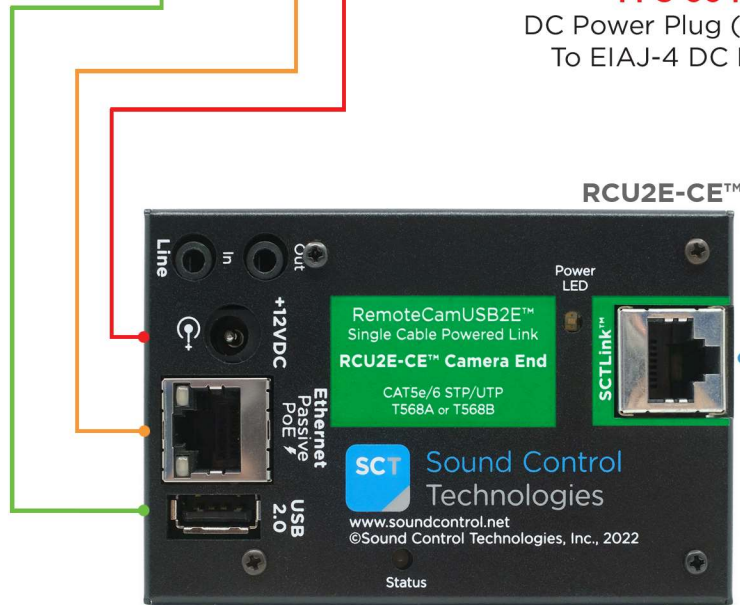

SCTLink™ Cable
Power, Control & Video

Refer to the RCU2E data sheet for cable specifications

WPS-12 30VDC
100-240V 47-63Hz
Power Supply



RCC-H016-1.0M
RJ45 (RCU2E-CE™) to RJ45

RCC-M004-1.0M
USB-B (RCU2E-HE™) to USB-A

RCC-M014-1.0M
USB-B (RCU2E-HE™) to USB-C

Module Dimensions

RCU2E-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)

RCU2E-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)