




The **RCU2S-B00™** supports multiple camera models:

- Avaya HC020
- ClearOne Unite 50
- Lumens VC-B10U
- StarLeaf Camera C10
- Avonic AV-CM22-VCU
- Huddlecam HC-EPTZ-USB
- Minrray MG200C
- VHD JX1700U

RCU2S-HE™ Front Panel
Field-Upgradeable microSD Slot

Shown: **ClearOne Unite 50**

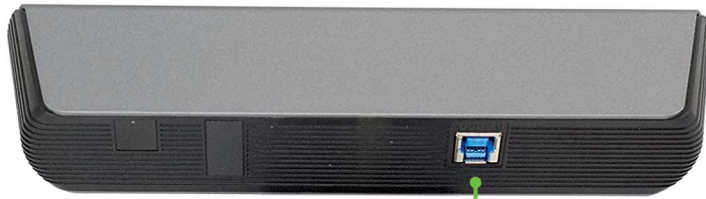

RCC-M004-0.3M

USB-A (RCU2S-CE™) to USB-B [5VDC]

If USB is sole connection between the camera and RCU2S-CE™, then **up to 1.2 Amperes/6 Watts** is supported.

RCU2S-CE™



RCC-M014-1.0M or **RCC-M004-1.0M**
USB-B (RCU2S-HE™) to USB-C
USB-B (RCU2S-HE™) to USB-A



Laptop



RCU2S-HE™

SCTLink™ Cable

Power, Control & Video

Refer to the RCU2S data sheet for cable specifications

WPS-12 30VDC
100-240V 47-63Hz
Power Supply



Module Dimensions

RCU2S-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)

RCU2S-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)