



The RCU2S-B20™ supports multiple camera models:

- 1Beyond AutoFinder & AutoFramer
- AVer VB130
- AVer Cam 520 Pro & Pro 2
- AVer Cam 520 Pro Advanced
- AVer Cam 550
- Huddlecam HC12X-HUDDLEVIEW
- Huddlecam SIMPLTRACK LITE
- Huddlecam HC20X-SIMPLTRACK2 (shown)



RCU2S-HE™ Front Panel
Field-Upgradeable microSD Slot

RCC-M004-1.0M
USB-B (RCU2S-HE™) to USB-A



Laptop

3.5mm Audio Cable
Integrator-Supplied

RCC-M004-0.3M
USB-A (RCU2S-CE™) to USB-B


PPC-022-0.3M
RJ11 (RCU2S-CE™) to 5.5mm x 2.1mm Barrel



RCU2S-HE™

SCTLInk™ Cable
Power, Control & Video
Refer to the RCU2S data sheet for cable specification

WPS-12 30VDC
100-240V 47-63Hz
Power Supply

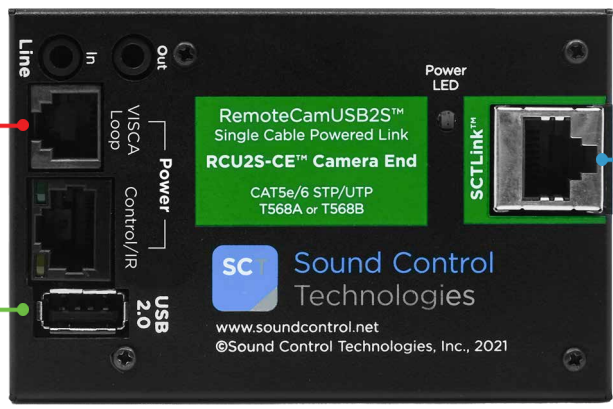

RCU2S-CE™

Note: The RCU2S is not compatible with Zoom Intelligent Director. Please see our RCU3SL-B20 kit.



Module Dimensions

RCU2S-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)

RCU2S-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)