

The **RCU2S-C00™** supports multiple device models:

- Aver CAM 340+\*
- Huddly IQ/GO
- Lumens VC-B11U
- Poly X50/X52/X70/X72\* Device Mode
- Biamp VBC 2500\* /VBC 2800\*
- Jabra Panacast 3
- Panasonic AW-UE4\*
- VDO360 3SEE
- Bose VB1\*
- Logitech Rally Bar\*
- Poly G7500 Codec\*

**RCU2S-HE™ Front Panel**  
Field-Upgradeable microSD Slot

Shown: **Poly G7500 Codec**




**RCC-M005-0.3M**  
USB-A (RCU2S-CE™) to USB-C



**RCC-M004-1.0M**  
USB-B (RCU2S-HE™) to USB-A




Laptop



RCU2S-HE™

**SCTLINK™ Cable**  
Power, Control & Video  
Refer to the RCU2S data sheet for cable specification

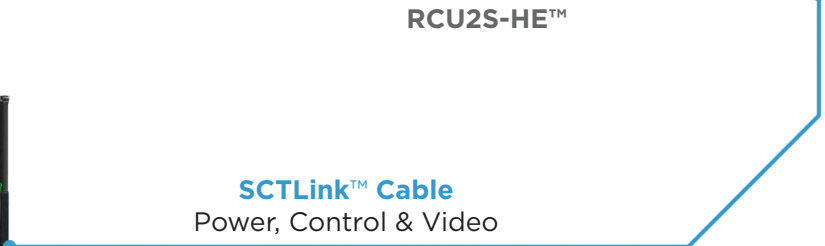

**WPS-12 30VDC**  
100-240V 47-63Hz  
Power Supply



\*RCU2S does not power these devices. Use the manufacturer included power supply.

**Module Dimensions**

RCU2S-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)

RCU2S-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)