



Logitech Rally
Camera



Laptop

RCU2S-HE™ Front Panel

Field-Upgradeable microSD Slot

Logitech Sync Software Support

DipSwitch #4:

Turn off for all non-Logitech cameras
Turn on for Logitech cameras

RCC-M004-1.0M

USB-B (RCU2S-HE™) to USB-A

PPC-019-0.3M

RJ11 (RCU2S-CE™) to 4mm Power
Barrel (Logitech Injector) 12VDC

Logitech-Provided
POE Injector Module
(993-001903)

RCC-M005-0.3M

USB-A (RCU2S-CE™) to
USB-C (Logitech Injector)




SCTLink™ Cable

Power, Control & Video

Refer to the RCU2S data
sheet for cable specifications

WPS-12 30VDC
100-240V 47-63Hz
Power Supply

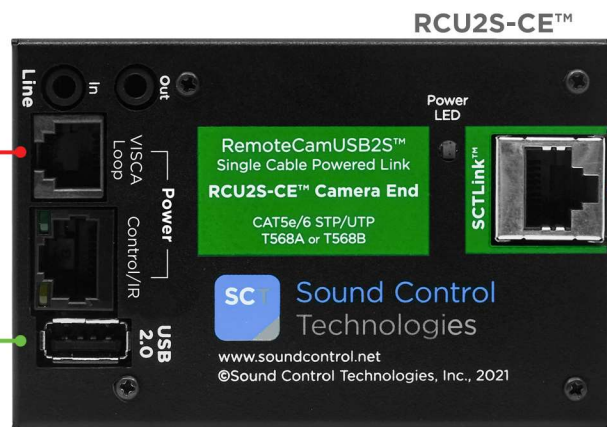

Module Dimensions

RCU2S-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)

RCU2S-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)