




Cisco Room Bar



**\*Can be used on Tx or Rx.\***  
**WPS-30V2A 30VDC**  
Power Supply

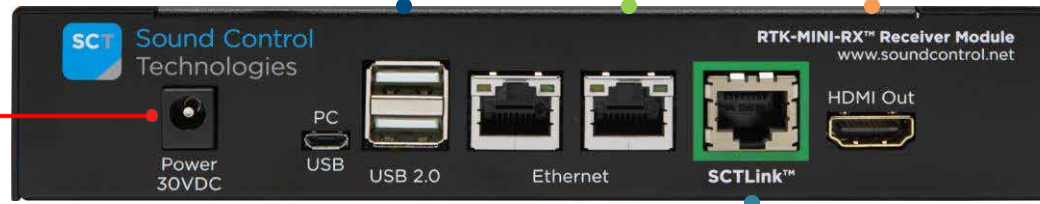

**RTK-MINI-RX™**  
Receiver Module



Cisco Navigator or Touch 10

**RCC-H016-1.0M**  
RJ45 to RJ45 UTP Control Cable



**RTK-MINI-TX™**  
Transmitter Module

**RCC-M006-2.0M**  
USB Micro-B (RTK-MINI-TX™) to USB-A




Laptop

**SCTLink™ Cable**  
Ethernet/POE | HDMI | USB

The SCTLink™ cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

**RCC-H001-2.0M**  
HDMI to HDMI Video Cable

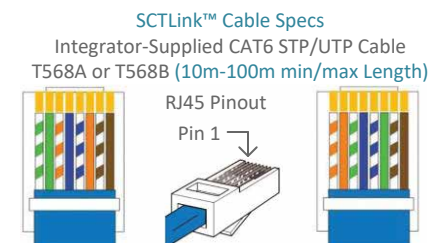

### Module Dimensions

RTK-MINI-TX™: H: 1.394" (35mm) x W: 7.283" (185mm) x D: 4.484" (114mm)

RTK-MINI-RX™: H: 1.394" (35mm) x W: 7.283" (185mm) x D: 4.484" (114mm)

RCC-M006-1.0M