




Cisco Room Bar



Can be used on Tx or Rx.

WPS-30V2A 30VDC
Power Supply

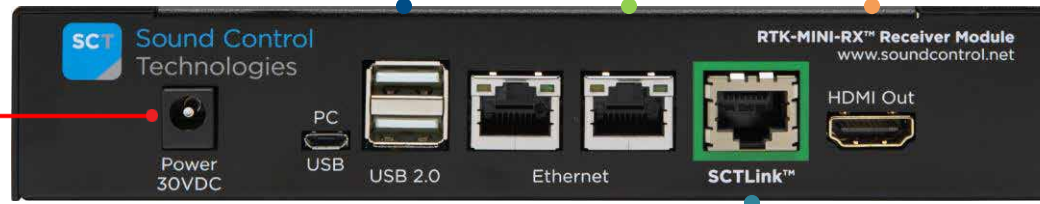

RTK-MINI-RX™
Receiver Module

SCTLink™ Cable
Ethernet/POE | HDMI | USB

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

RCC-H016-1.0M

RJ45 to RJ45 UTP Control Cable



Cisco Navigator or Touch 10



RTK-MINI-TX™
Transmitter Module

RCC-M006-2.0M

USB Micro-B (RTK-MINI-TX™) to USB-A



Laptop

RCC-H001-2.0M

HDMI to HDMI Video Cable

Module Dimensions

RTK-MINI-TX™: **H:** 1.394" (35mm) x **W:** 7.283" (185mm) x **D:** 4.484" (114mm)

RTK-MINI-RX™: **H:** 1.394" (35mm) x **W:** 7.283" (185mm) x **D:** 4.484" (114mm)

