

Poly Studio X30 [Shown], Studio X32, Studio X50, Studio X52, Studio X70 & Studio X72




RCC-M005-1.0M
USB-A (RTK-MINI-RX™) to USB-C

RCC-H016-1.0M
RJ45 UTP Control Cable

RCC-H001-1.0M
HDMI Video Cable

Network Switch

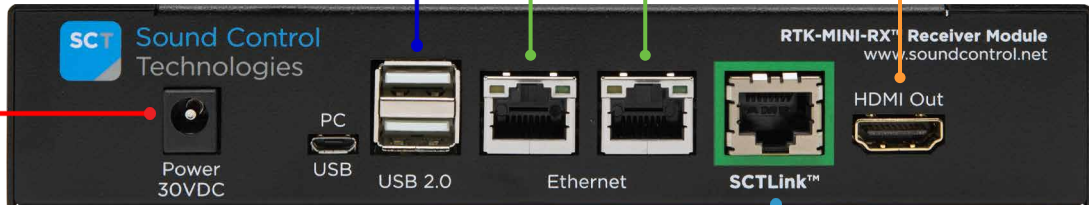

RTK-MINI-RX™
Receiver Module

SCTLink™ Cable
Ethernet/POE | HDMI | USB
The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.



RTK-MINI-TX™
Transmitter Module


RCC-M006-2.0M
USB Micro B (RTK-MINI-TX™) to USB-A



Laptop

RCC-H001-2.0M
HDMI Video Cable

Can be used on Tx or Rx.
WPS-12 30VDC
100-240V 47-63Hz
Power Supply



Poly TC8 or TC10
Poly Provided

Module Dimensions

RTK-MINI-TX™: H: 1.394" (35mm) x W: 7.283" (185mm) x D: 4.484" (114mm)
RTK-MINI-RX™: H: 1.394" (35mm) x W: 7.283" (185mm) x D: 4.484" (114mm)

