




### RTK-Transmitter™ Table Module



Cisco Microphones Supports Cisco Table-J


RCC-M006-1.0M USB-B Micro to USB-A \*Purchased Separately

#### SCTLink™ Cable\*

Ethernet/POE; Cisco Mic TRRS; HDMI; Audio I/O & USB up to 100m CAT5e/CAT6  
The SCTLink™ cable must always be a single, point-to-point CAT cable with no couplers or interconnections.



Cisco Navigator Ethernet/POE \*Cisco Provided\*



\*Can be used on Tx or Rx.\*


WPS-12 30VDC 100-240V 47-63Hz



### RTK-Receiver™ Codec Module



\*SCTLink™ Cable Specs  
Integrator-Supplied CAT5e/CAT6 STP/UTP Cable EIA568A or EIA568B (10m-100m min/max Length)

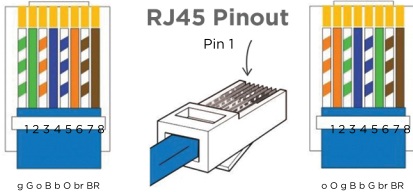

RCC-H001-1.0M HDMI Cable

RCC-H016-1.0M UTP Cable

RCC-M005-0.3M USB-A to USB-C \*Purchased Separately

RCC-C018-1.0M TRRS to TRRS Cables



Cisco Webex Codec EQ

#### Module Dimensions

RTK-TX™: H: 1.39" (35mm) x W: 10.22" (259mm) x D: 4.51" (114mm)

RTK-RX™: H: 1.39" (35mm) x W: 10.22" (259mm) x D: 4.51" (114mm)