


Cisco SX80, Codec Pro & Codec Plus




Cisco Precision 60

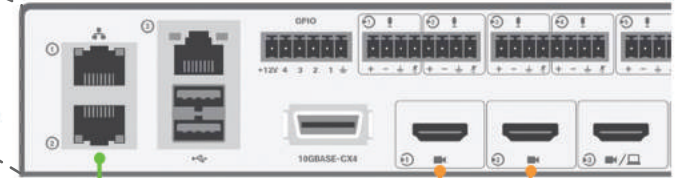

[2] **RCC-H001-1.0M**
HDMI to HDMI Video Cables

[2] **RCC-H016-1.0M**
RJ45 to RJ45 UTP Control Cables

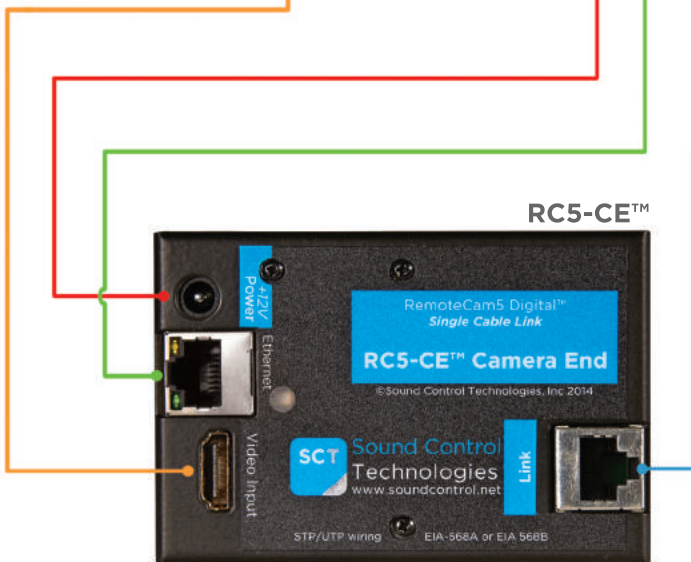

RCC-C001-0.3M
HDMI to HDMI
Video Cable

RCC-C002-0.3M
RJ45 to RJ45
UTP Control Cable

PPC-003-0.4M
Power Cable

Module Dimensions

RC5-CE™: H: 0.93" (23mm) x W: 2.5" (63mm) x D: 3.741" (95mm)



RC5-HE™: H: 1.504" (38mm) x W: 3.813" (96mm) x D: 3.617" (91mm)

SCTLink™ Cable
Power, Control & Video


The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
T568A or T568B (10m-100m min/max Length)

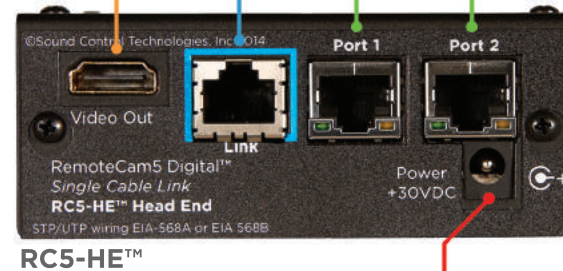

WPS-12 30VDC
100-240V 47-63Hz
Power Supply

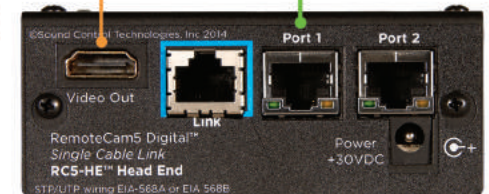

2nd Camera Deployment