



Sony SRG-120DU,
PTZOptics, Lumens, VHD,
Marshall & HuddleCam

RCC-C006-0.4M
Purchased Separately
RJ11 (RCU2-CE™) to 8 Pin Mini Din

RCC-M004-0.3M
USB-A (RCU2-CE™)
to USB-B

RCC-C005-0.3M
RJ45 (RCU2-CE™) Y Cable
to 8 Pin Mini Din
to 4mm Power Barrel



VISCA Control Device

RCC-H013-1.0M
Purchased Separately
DB9 (RCU2-HE™)
to 8 Pin Din (Aver)

RCC-M004-1.0M
USB-B (RCU2-HE™) to
USB-A (Computer)



Laptop




RCU2-HE™

SCTLink™ Cable
Power, Control & Video

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
EIA568A or EIA568B (10m-100m min/max Length)

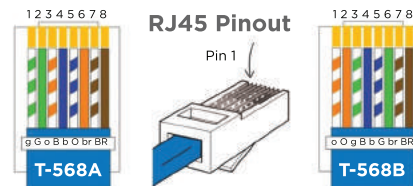

WPS-12 30VDC
100-240V 47-63Hz
Power Supply



Module Dimensions

RCU2-CE™: 2.264" W x 0.789"H x 3.725"D

RCU2-HE™: 3.8"W x 1.5"H x 3.814"D