



The **RCU2E-A00™** supports multiple camera models:

- Lumens VC-TR1
- Minrray UV510A
- PTZOptics Link 4K
- PTZOptics Move 4K

Minrray UV510A



RCC-M003-0.3M


USB-A (RCU2E-CE™) to USB-A

RCC-C002-0.3M

RJ45 (RCU2E-CE™) to RJ45

SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
T568A or T568B (100m Max Length)

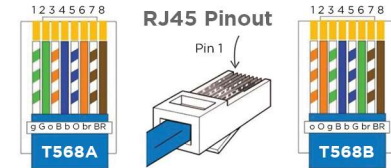

RCU2E-HE™ Front Panel

Field-Upgradeable microSD Slot

RCU2E-HE™




SCTLink™ Cable

Power, Control & Video

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

WPS-12 30VDC
100-240V 47-63Hz
Power Supply

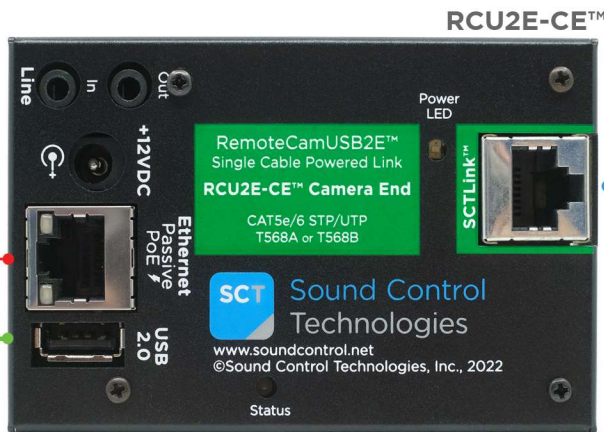

RCC-H016-1.0M

RJ45 (RCU2E-CE™) to RJ45

RCC-M004-1.0M

USB-B (RCU2E-HE™) to USB-A

RCC-M014-1.0M

USB-B (RCU2E-HE™) to USB-C

Laptop



Module Dimensions

RCU2E-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)

RCU2E-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)