



## RCU2E-A10™ USB Application Guide

Updated: 10/10/2023

The **RCU2E-A10™** supports multiple camera models:

- Lumens VC-TR1
- Minrray UV510A




Minrray UV510A


**RCC-M005-0.3M**  
USB-A (RCU2E-CE™) to USB-C

**RCC-C002-0.3M**  
RJ45 (RCU2E-CE™) to RJ45

**PPC-004-0.4M**  
DC Power Plug (RCU2E-CE™) to EIAJ-4 DC Power Plug

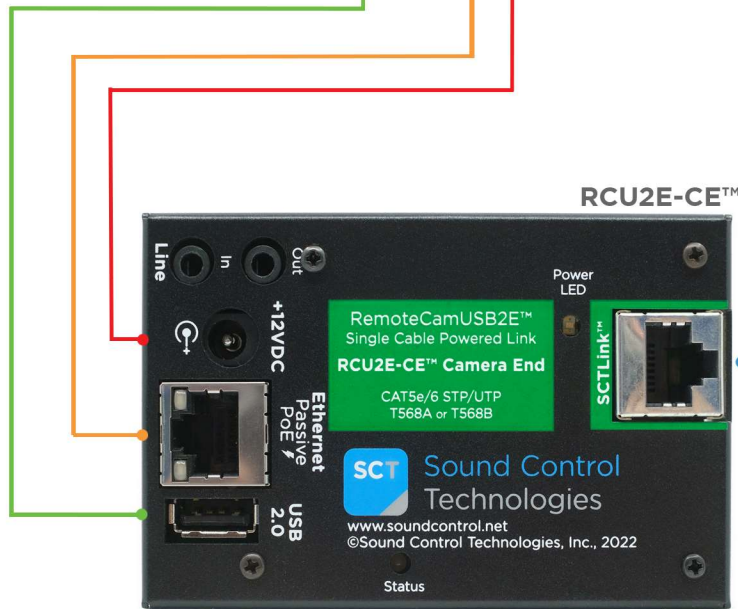

**SCTLink™ Cable Specs**  
Integrator-Supplied CAT5e/CAT6 STP/UTP Cable  
T568A or T568B (100m Max Length)

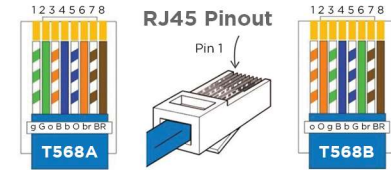

**RCU2E-HE™ Front Panel**  
Field-Upgradeable microSD Slot



**SCTLink™ Cable**  
Power, Control & Video

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

**WPS-12 30VDC**  
100-240V 47-63Hz  
Power Supply



**RCC-C002-0.3M**  
RJ45 (RCU2E-CE™) to RJ45

**RCC-M004-1.0M**  
USB-B (RCU2E-HE™) to USB-A

### Module Dimensions

RCU2E-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)

RCU2E-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)