



# Sound Control Technologies

## RCU2E-B30™ USB Application Guide

Updated: 08/02/2024

### AVer Cam550



The **RCU2S-B30™** supports multiple camera models:

- 1Beyond IV-CAMFR-12
- 1Beyond AutoFramer
- 1Beyond AutoTracker
- AVer Cam520 Pro Advanced
- AVer Cam550
- AVer Cam570
- AVer TR535

### RCC-M004-0.3M

USB-A (RCU2E-CE™) to USB-B

### RCC-C002-0.3M


RJ45 (RCU2E-CE™) to RJ45

### PPC-003-0.3M

DC Power Plug (RCU2E-CE™) To DC Power Plug




### RCU2E-CE™

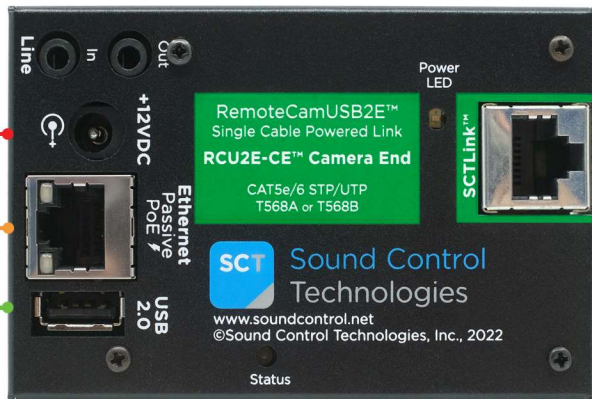

### SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable  
T568A or T568B (100m Max Length)

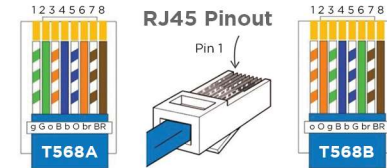

### RCU2E-HE™ Front Panel

Field-Upgradeable microSD Slot

### RCU2E-HE™



### SCTLink™ Cable

Power, Control & Video

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

WPS-12 30VDC  
100-240V 47-63Hz  
Power Supply



Laptop



### RCC-H016-1.0M

RJ45 (RCU2E-CE™) to RJ45

### RCC-M004-1.0M

USB-B (RCU2E-HE™) to USB-A

### RCC-M014-1.0M

USB-B (RCU2E-HE™) to USB-C

### Module Dimensions

RCU2E-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)

RCU2E-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)