


Poly Studio X30 [Shown], Studio X50, & Studio X70

Note: Set the Conferencing Provider to Device Mode in Poly web configuration




RCC-M005-1.0M
USB-A (RTK-MINI-RX™) to USB-C

RCC-H001-1.0M
HDMI Cable

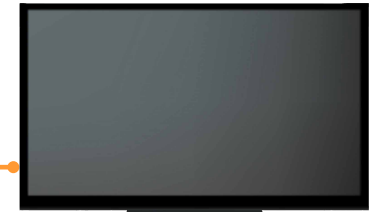

TV/Monitor

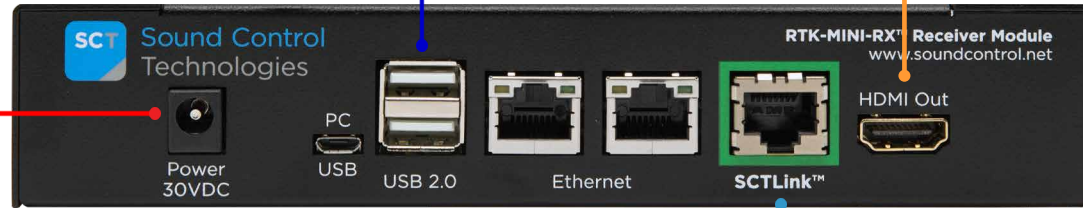

RTK-MINI-RX™ Receiver Module

SCTLink™ Cable

Ethernet/POE | HDMI | USB

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

RTK-MINI-TX™ Transmitter Module



RCC-H001-2.0M
HDMI Cable

RCC-M006-2.0M
USB Micro B to USB-A



Laptop

RCC-M015-2.0M
USB-C to USB-C Cable



USB-PDI™ (Optional)

SCTLink™ Cable Specs

Integrator-Supplied CAT6 STP/UTP Cable T568A or T568B (10m-100m min/max Length)

