



AVer TR323NV2



The **RCU2E-B40™** supports multiple camera models:

- AVer TR313
- AVer TR323NV2
- AVer TR530+
- Crestron IV-CAM-I12-B
- Crestron IV-CAM-I20-B
- Lumens VC-TR1
- Lumens VC-TR40
- Minrray UV510A
- Minrray UV570
- Sony SRG-XP1
- VDO360 Saber20X
- VHD VX120
- VHD VX710N
- VHD VX701L

RCC-M004-0.3M

USB-A (RCU2E-CE™) to USB-B

RCC-C002-0.3M


RJ45 (RCU2E-CE™) to RJ45

PPC-004-0.3M

DC Power Plug (RCU2E-CE™) To EIAJ-4 DC Power Plug

SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
T568A or T568B (100m Max Length)

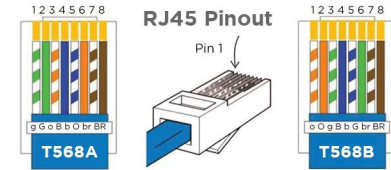

RCU2E-HE™ Front Panel

Field-Upgradeable microSD Slot

RCU2E-HE™




SCTLink™ Cable

Power, Control & Video

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

WPS-12 30VDC
100-240V 47-63Hz
Power Supply

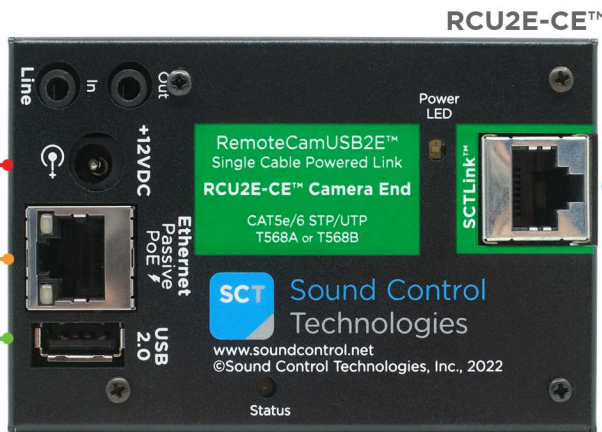

Laptop



RCC-H016-1.0MM

RJ45 (RCU2E-CE™) to RJ45

RCC-M004-1.0M

USB-B (RCU2E-HE™) to USB-A

RCC-M014-1.0M

USB-B (RCU2E-HE™) to USB-C

Module Dimensions

RCU2E-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)

RCU2E-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)