



AVer PTZ310, PTZ330, CAM520 & CAM530

**3.5mm Audio Cable**  
Integrator-Supplied

**RCC-M006-0.3M**  
USB-A (RCU2S-CE™) to USB Micro-B

**RCC-C005-0.3M**  
RJ45 (RCU2S-CE™) to 8-Pin Mini-Din (UNUSED) to EIAJ-4 Barrel Connector



RCU2S-CE™

### Module Dimensions

RCU2S-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)


RCU2S-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)

**RCU2S-HE™ Front Panel**  
Field-Upgradeable microSD Slot

**RCC-M004-1.0M**  
USB-B (RCU2S-HE™) to USB-A



Laptop

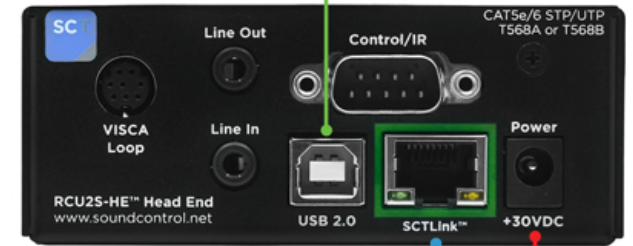


RCU2S-HE™

**SCTLINK™ Cable**  
Power, Control & Video

The SCTLINK™ cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

### SCTLINK™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable  
T568A or T568B (100m Max Length)



**WPS-12 30VDC**  
100-240V 47-63Hz  
Power Supply

