


The **RCU2S-G30™** supports multiple camera models:

- Panasonic AW-HE38H
- Panasonic AW-HN38H
- Panasonic AW-HE40S
- Panasonic AW HN40H
- Panasonic AW-UE70
- Panasonic AW-UN70




Shown: **Panasonic AW-UE70**

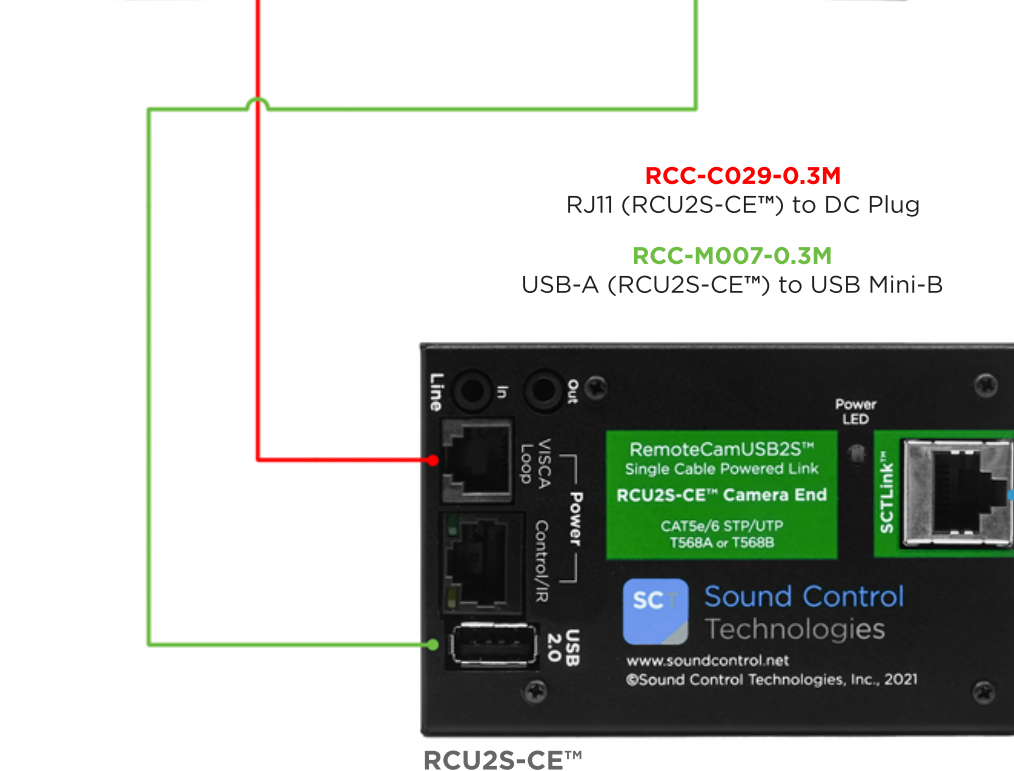

**Module Dimensions**  
**RCU2S-CE™:** H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)  
**RCU2S-HE™:** H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)

**RCU2S-HE™ Front Panel**  
Field-Upgradeable microSD Slot

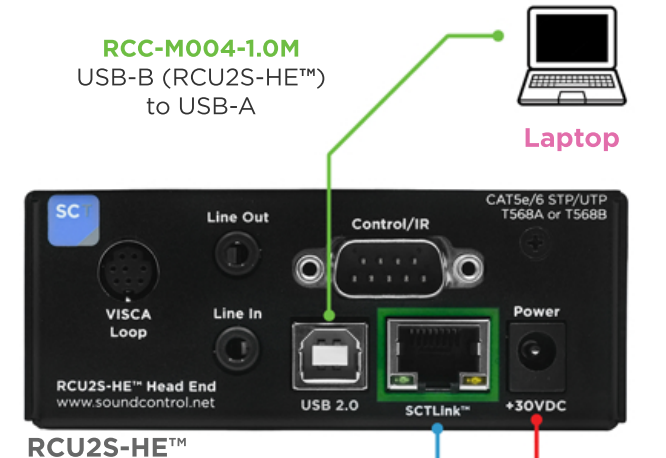

**SCTLink™ Cable**  
Power, UVC Control & Video

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

**WPS-12 30VDC**  
100-240V 47-63Hz  
Power Supply

**SCTLink™ Cable Specs**  
Integrator-Supplied CAT5e/CAT6 STP/UTP Cable  
T568A or T568B (100m Max Length)

