


The **RCU2S-GC8™** supports multiple camera models:

- Panasonic AW-HE38H
- Panasonic AW-HN38H
- Panasonic AW-HE40S
- Panasonic AW-UE70
- Panasonic AW-UN70

Shown: **Panasonic AW-UE70**

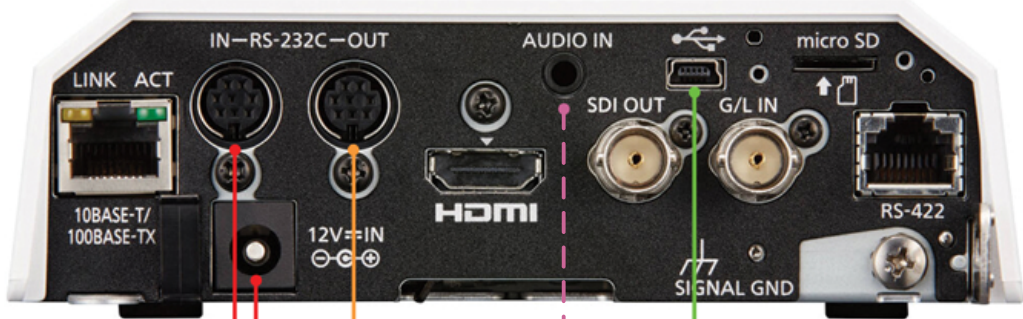


RCU2S-HE™ Front Panel
Field-Upgradeable microSD Slot

RCC-M004-1.0M
USB-B (RCU2S-HE™) to USB-A



Laptop

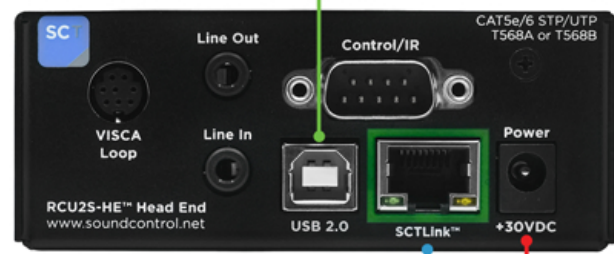

RCU2S-HE™

3.5mm Audio Cable
Integrator-Supplied

RCC-C008-0.5M
RJ45 (RCU2S-CE™) Y Cable to 4mm Power Barrel to 8 Pin Mini Din

RCC-C006-0.4M*
RJ11 (RCU2S-CE™) to 8 Pin Mini Din

***Purchased Separately:**
Cable required for VISCA Loop or Daisy Chain Functionality

SCTLink™ Cable
Power, Control & Video


The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

WPS-12 30VDC
100-240V 47-63Hz
Power Supply



SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
T568A or T568B (100m Max Length)

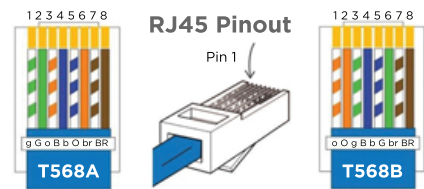

RCU2S-CE™

RCC-M007-0.3M
USB-A (RCU2S-CE™) to USB Mini-B

Module Dimensions
RCU2S-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)
RCU2S-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)