


The **RCU2S-H00™** supports multiple camera models:

- ClearOne Unite 20
- Huddlecam HC-WEBCAM-94
- Huddlecam HC-WEBCAM-104-v2
- Huddlecam HuddlePair (Camera Only)
- Huddlecam HC-GO-BK

Shown: **ClearOne Unite 20**



ClearOne Supplied Cable

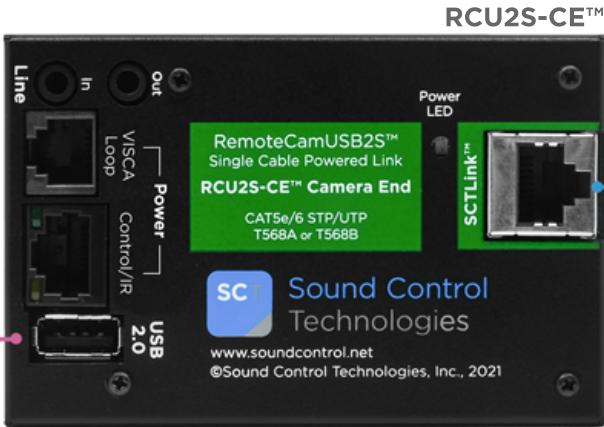


Module Dimensions
RCU2S-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)
RCU2S-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)

RCU2S-HE™ Front Panel
Field-Upgradeable microSD Slot



Laptop

RCC-M004-1.0M
USB-B (RCU2S-HE™) to USB-A

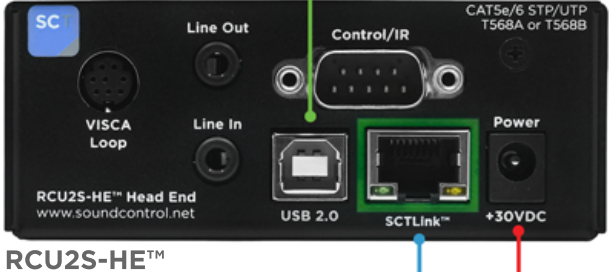

RCU2S-HE™

SCTLink™ Cable
Power, Control & Video

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

WPS-12 30VDC
100-240V 47-63Hz
Power Supply



SCTLink™ Cable Specs
Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
T568A or T568B (100m Max Length)

