





Jabra Panacast 50

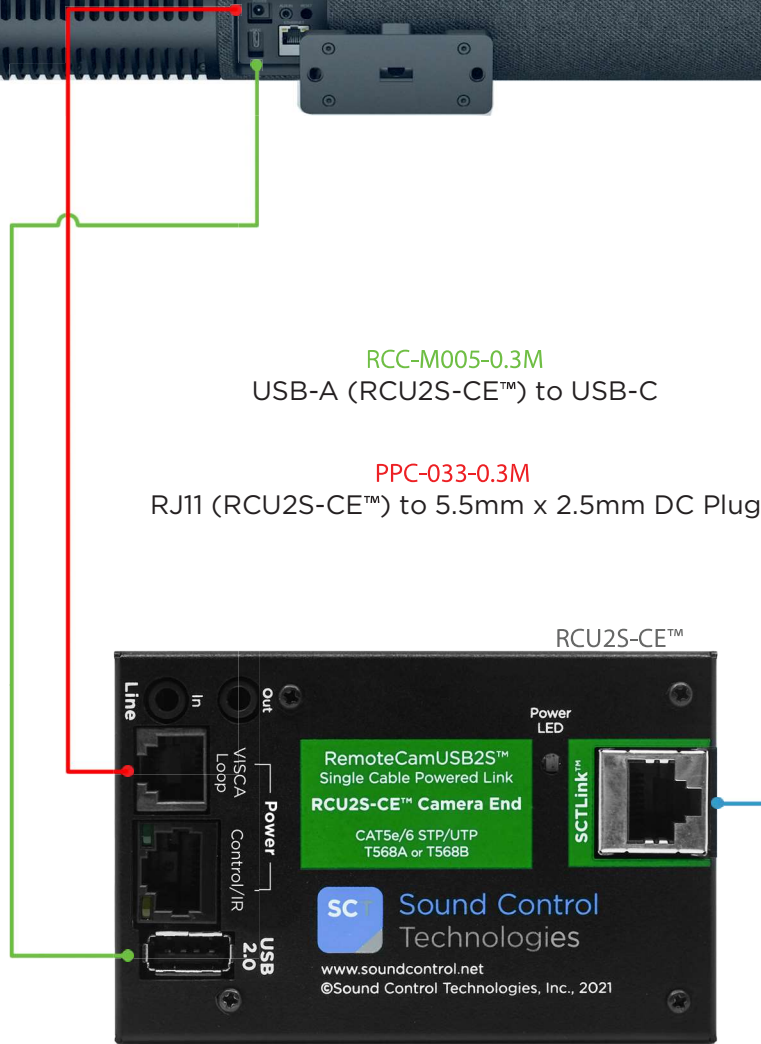

SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
T568A or T568B (100m Max Length)

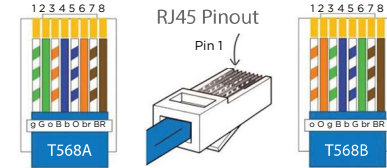

RCU2S-HE™ Front Panel Field-Upgradeable microSD Slot




RCU2S-HE™

SCTLink™ Cable
Power, Control & Video

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

WPS-12 30VDC
100-240V 47-63Hz
Power Supply




RCC-M004-1.0M
USB-B (RCU2S-HE™) to USB-A

Module Dimensions

RCU2S-CE™: **H:** 0.789" (20mm) x **W:** 2.264" (57mm) x **D:** 3.725" (94mm)

RCU2S-HE™: **H:** 1.448" (36mm) x **W:** 3.814" (96mm) x **D:** 3.578" (90mm)