



Logitech Rally Camera



Laptop

RCU2S-HE™ Front Panel
Field-Upgradeable microSD Slot

Logitech Sync Software Support
DipSwitch #4:
Turn off for all non-Logitech cameras
Turn on for Logitech cameras

RCC-M004-1.0M
USB-B (RCU2S-HE™) to USB-A

PPC-019-0.3M
RJ11 (RCU2S-CE™) to 4mm Power Barrel (Logitech Injector) 12VDC

Logitech-Provided
POE Injector Module
(993-001903)

RCC-M005-0.3M
USB-A (RCU2S-CE™) to
USB-C (Logitech Injector)




RCU2S-HE™

CAT5e/6 STP/UTP
T568A or T568B

SCTLink™ Cable
Power, Control & Video

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

WPS-12 30VDC
100-240V 47-63Hz
Power Supply

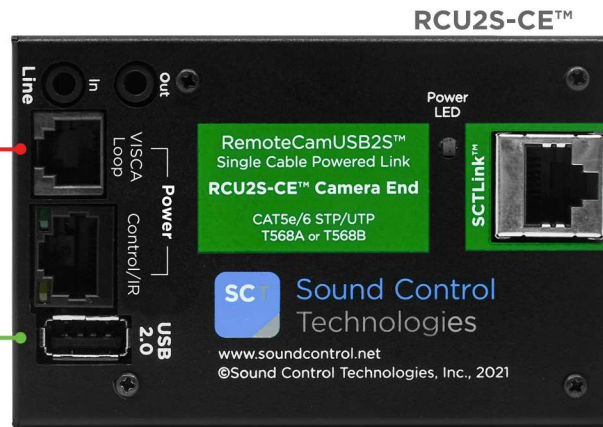


RCU2S-CE™

RemoteCamUSB2S™
Single Cable Powered Link
RCU2S-CE™ Camera End
CAT5e/6 STP/UTP
T568A or T568B

SC Sound Control Technologies
www.soundcontrol.net
©Sound Control Technologies, Inc., 2021

SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
T568A or T568B (100m Max Length)



Module Dimensions

RCU2S-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)

RCU2S-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)