



## RCU2S-PRO™ USB Application Guide


Updated: 3/10/2022



**Logitech Group or PTZ PRO 2**

### SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable  
T568A or T568B (100m Max Length)



**RCU2S-HE™ Front Panel**  
Field-Upgradeable microSD Slot

### SCTLink™ Cable


Power, Control & Video

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.



**WPS-12 30VDC**  
100-240V 47-63Hz  
Power Supply

**RCC-C039-0.3M**  
6-Pin Mini-Din (Logitech) to USB-A (RCU2S-CE™) to RJ45 (RCU2S-CE™)

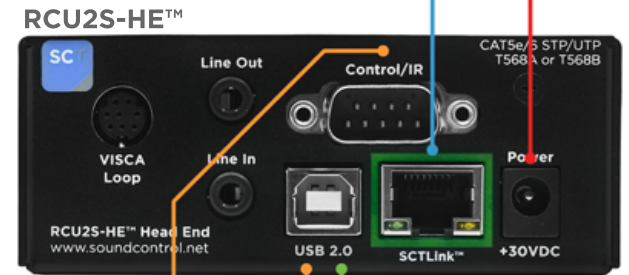

**Laptop**  
Logitech Cable 993-001131



**Logitech Group Speakerphone**  
Logitech Cable 993-001137



« Logitech Group Kit »  
» Logitech PTZ Pro 2 Camera Only

**RCC-H039-1.0M**  
6-Pin Mini-Din (Logitech) to USB-B (RCU2S-HE™) to DB9F (RCU2S-HE™)

**RCC-M004-1.0M**  
USB-B (RCU2S-HE™) to USB-A

**Laptop**

### Module Dimensions

RCU2S-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)

RCU2S-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)