



RM-3CP™ Table Module




Cisco Microphones


Supports up to [3] Cisco Mics:
Cisco Mic 20 & Cisco Table-J

*SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
EIA568A or EIA568B (10m-100m min/max Length)

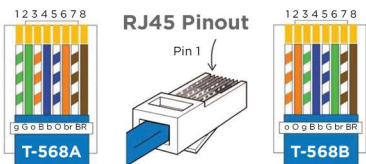

SCTLink™ Cable*
Ethernet/POE; Cisco Mic TRRS; HDMI;
Audio I/O & USB up to 100m CAT5e/CAT6
The **SCTLink™** cable must always be
a single, point-to-point CAT cable with
no couplers or interconnections.

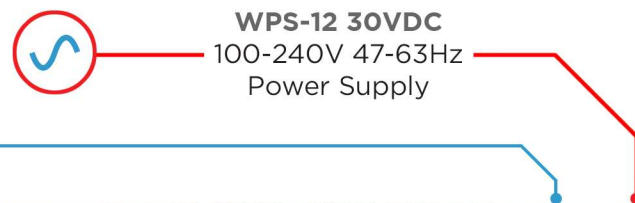

RM-3CP™ Codec Module

RCC-C018-1.0M
TRRS to TRRS Cables



Cisco Codec Plus, Codec EQ, Room 55, Room 55 Dual,
Room 70 G1, Room 70 Dual G1 & Room Kit Plus, Room Bar, Room Bar Pro

Module Dimensions

RM-3CP-TX™: H: 0.88" (22mm) x W: 5.09" (129mm) x D: 3.63" (92mm)

RM_3CP-RX™: H: 0.88" (22mm) x W: 5.09" (129mm) x D: 3.63" (92mm)