




Poly Studio X30 [Shown], Studio X32, Studio X50, Studio X52, Studio X70 & Studio X72



RCC-M005-1.0M
USB-A (RTK-MINI-RX™) to USB-C

RCC-H016-1.0M
RJ45 UTP Control Cable

RCC-H001-1.0M
HDMI Video Cable

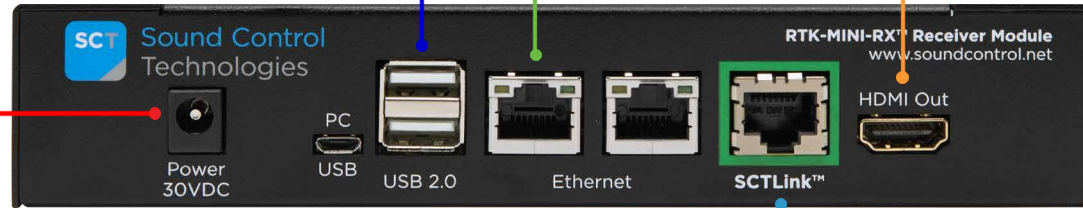

RTK-MINI-RX™
Receiver Module

SCTLink™ Cable

Ethernet/POE | HDMI | USB

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.



RTK-MINI-TX™
Transmitter Module

RCC-M006-2.0M
USB Micro B (RTK-MINI-TX™) to USB-A



Laptop

RCC-H001-2.0M
HDMI Video Cable

Can be used on Tx or Rx.



WPS-12 30VDC
100-240V 47-63Hz
Power Supply



Poly TC8
Poly Provided

Module Dimensions

RTK-MINI-TX™: H: 1.394" (35mm) x W: 7.283" (185mm) x D: 4.484" (114mm)

RTK-MINI-RX™: H: 1.394" (35mm) x W: 7.283" (185mm) x D: 4.484" (114mm)

SCTLink™ Cable Specs

Integrator-Supplied CAT6 STP/UTP Cable
T568A or T568B (10m-100m min/max Length)

