

USB 2.0 Device (Client)
 Uni-Directional Function can be used at either end; See FAQ for more details.




Cisco Touch10
 Ethernet/POE
 Cisco Provided

Can be used on Tx or Rx.
WPS-12 30VDC
 100-240V 47-63Hz
 Power Supply

Cisco Microphones
 Supports up to [3] Cisco Mics:
 Cisco Mic 20 & Cisco Table-J

***SCTLink™ Cable Specs**
 Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
 EIA568A or EIA568B (10m-100m min/max Length)

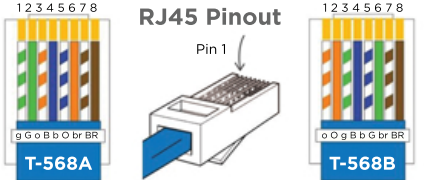

Module Dimensions
 RTK-TX™: H: 1.39" (35mm) x W: 10.22" (259mm) x D: 4.51" (114mm)
 RTK-RX™: H: 1.39" (35mm) x W: 10.22" (259mm) x D: 4.51" (114mm)

Cisco Codec Plus, Room 55, Room 55 Dual, Room 70 G1, Room 70 Dual G1 & Room Kit Plus