



RTK-Transmitter™ Table Module



RCC-M006-1.0M
USB-B Micro to USB-A
**Purchased Separately*

RCC-H001-1.0M
HDMI Cable
**Purchased Separately*

Cisco Navigator
Ethernet/POE
Cisco Provided




Laptop



Cisco Microphones
Supports Cisco Table-J

SCTLink™ Cable*
Ethernet/POE; Cisco Mic TRRS; HDMI;
Audio I/O & USB up to 100m CAT5e/CAT6
The **SCTLink™** cable must always be
a single, point-to-point CAT cable with
no couplers or interconnections.


Can be used on Tx or Rx.
WPS-12 30VDC
100-240V 47-63Hz
Power Supply



RTK-Receiver™ Codec Module



**SCTLink™ Cable Specs*
Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
EIA568A or EIA568B (10m-100m min/max Length)

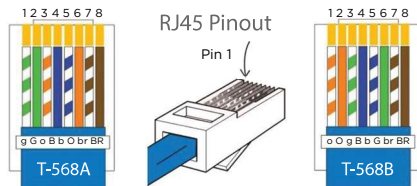

RCC-H001-1.0M
HDMI Cable

RCC-H016-1.0M
UTP Cable

RCC-M005-1.0M
USB-A to USB-C
**Purchased Separately*



Cisco Webex Room Bar Pro

RCC-C018-1.0M
TRRS to TRRS Cables

Module Dimensions

RTK-TX™: H: 1.39" (35mm) x W: 10.22" (259mm) x D: 4.51" (114mm)

RTK-RX™: H: 1.39" (35mm) x W: 10.22" (259mm) x D: 4.51" (114mm)