



### RTK-X57 Transmitter™ Module



Poly Expansion Mic



Poly TC8 & TC10  
\*Poly Provided\*

**RCC-M006-2.0M**  
USB-A to USB-B Micro

**RCC-H001-2.0M**  
HDMI Cable

**SCTLINK™ Cable\***  
Ethernet; HDMI; Audio I/O & USB  
up to 100m CAT5e/CAT6  
The **SCTLINK™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

*\*Can be used on Tx or Rx.\**

WPS-12 30VDC  
100-240V 47-63Hz  
Power Supply



### RTK-X57 Receiver™ Module



**RCC-H001-1.0M**  
HDMI Cable

**RCC-H016-1.0M**  
UTP Cable

**RCC-M010-1.0M**  
Microphone Cable


**RCC-M005-1.0M**  
USB-A to USB-C

**PPC-015-1.0M**  
Power Cable

Poly X50, X52, X70 & X72

### \*SCTLINK™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable  
EIA568A or EIA568B (10m-100m min/max Length)

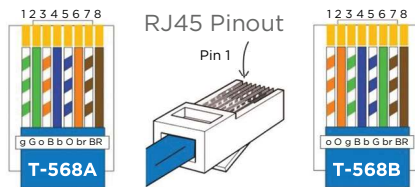

### Module Dimensions

RTK-X57-TX™: H: 1.39" (35mm) x W: 10.22" (259mm) x D: 4.51" (114mm)

RTK-X57-RX™: H: 1.39" (35mm) x W: 10.22" (259mm) x D: 4.51" (114mm)

