



RCU2S-CA8™ USB Application Guide

Updated: 02/17/2025



Supported Cameras:

- AVer PTC310
- AVer PTC310HN
- AVer TR310
- AVer TR311
- AVer TR311HN
- AVer TR313
- AVer TR331
- AVer TR333
- PTZ Optics Move SE

RCU2S-HE™ Front Panel
Field-Upgradeable microSD Slot

RCC-M004-1.0M
USB-B (RCU2S-HE™) to USB-A




3.5mm Audio Cable
Integrator-Supplied

RCC-M005-0.3M
USB-A (RCU2S-CE™) to USB-C

RCC-C005-0.3M
RJ45 (RCU2S-CE™) to EIAJ-4 Barrel Connector to 8-Pin Mini (Aver **COMPRO232**)


Aver COMPRO232
Aver-Supplied Adaptor Cable
8-Pin Mini-Din (**RCC-C005-0.3M**) to 9-Pin Mini-Din (**Adaptor Cable**)

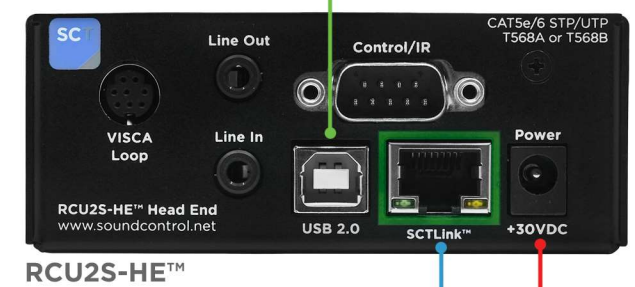

RCU2S-HE™

SCTLInk™ Cable
Power, Control & Video
Refer to the RCU2S data sheet for cable specifications

WPS-12 30VDC
100-240V 47-63Hz
Power Supply

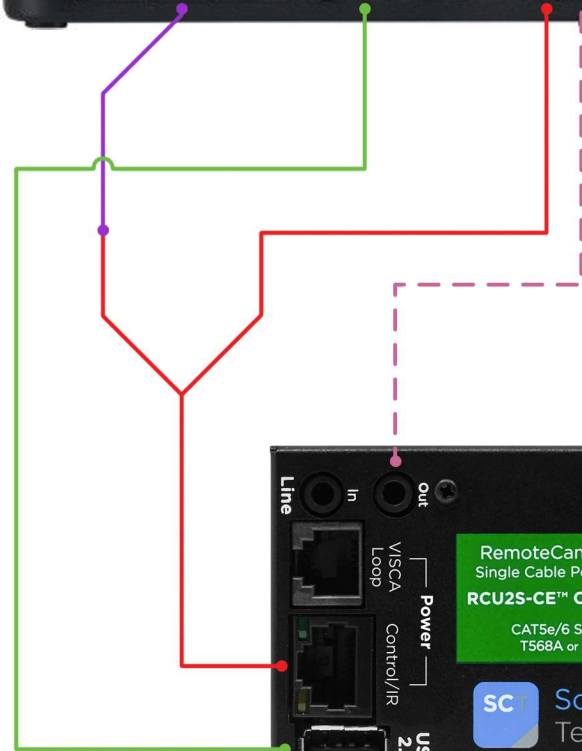

RCU2S-CE™

Module Dimensions

RCU2S-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)

RCU2S-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)

